


RY02KDU-4

皇室系列 
美标读卡器



-  金属外壳
-  颜色任选
-  触摸按键
-  艺术背景灯

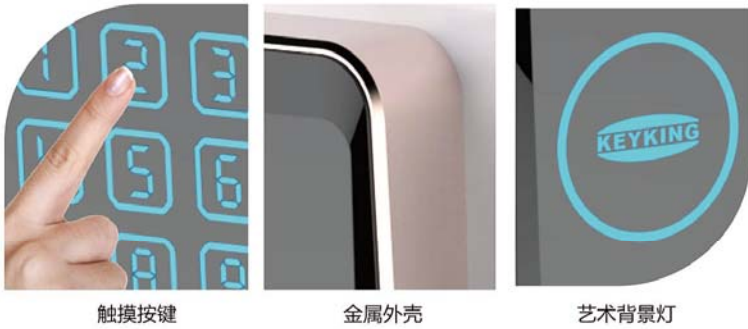

型号识别

RY 01 K D P - 4

- 4: RS485读卡器, 无数字或者W表示为Wiegand
- P; Proximity, EM、HID、AWID、KKID;
- U: Mifare扇区和CPU;
- D: Display含显示功能;
- K: 带Keypads键盘, 4/8Bits格式
- 01: 型号, 标准86底盒; 02: 美国电气标准, 75底盒;
- RY: Royal皇室系列;



Engineered by KEYKING TECH LABS ISRAEL
 Add: HaMasger 7, OR-YEUDA. 6022307, ISRAEL
 Tel: +972-3-6358025 Fax: +972-3-6358071
 E-mail: israel@keyking.net



功能特色

-  RF射频卡选项
- P : HID/Awid/EM/KKID Prox , 125KHz ;
U : Mifare/DesFire, Mifare Sector, CPU
-  金属外壳, 美观大方, 更加牢固
-  触摸键盘Touchpad, 经久耐用
-  标准维庚26/34Bits输出, 可搭配任何改格式门禁控制器
-  RS485格式输出选择, 传输距离更远, 数据加密后传输更安全
-  具防尘、防水的特点, 适合各种安装场所
-  低功耗, 更加节能, 稳定性好。
-  内置二色特效LED指示 (兰+纯绿), 方便黑暗指示
-  标准86底盒或美标底盒安装

技术参数


系列	P	U
参数	EM、HID、AWID、KKID	CPU+Mifare+RC
技术	EM4100, HID1386, KKID	KK1208, M-1, S50,S70
读卡距离	10cm	3cm
工作频率	125KHz	13.56MHz
加密方式	曼码调制	3Des
电压	7—15VDC	7—15VDC
电流	≤80ma	≤150ma
工作环境	-20°C到70°C	-20°C到65°C
湿度	5%--95%	5%--95%
尺寸	70×120×30mm, 美国标准75底盒	

型号识别



系统图

Network

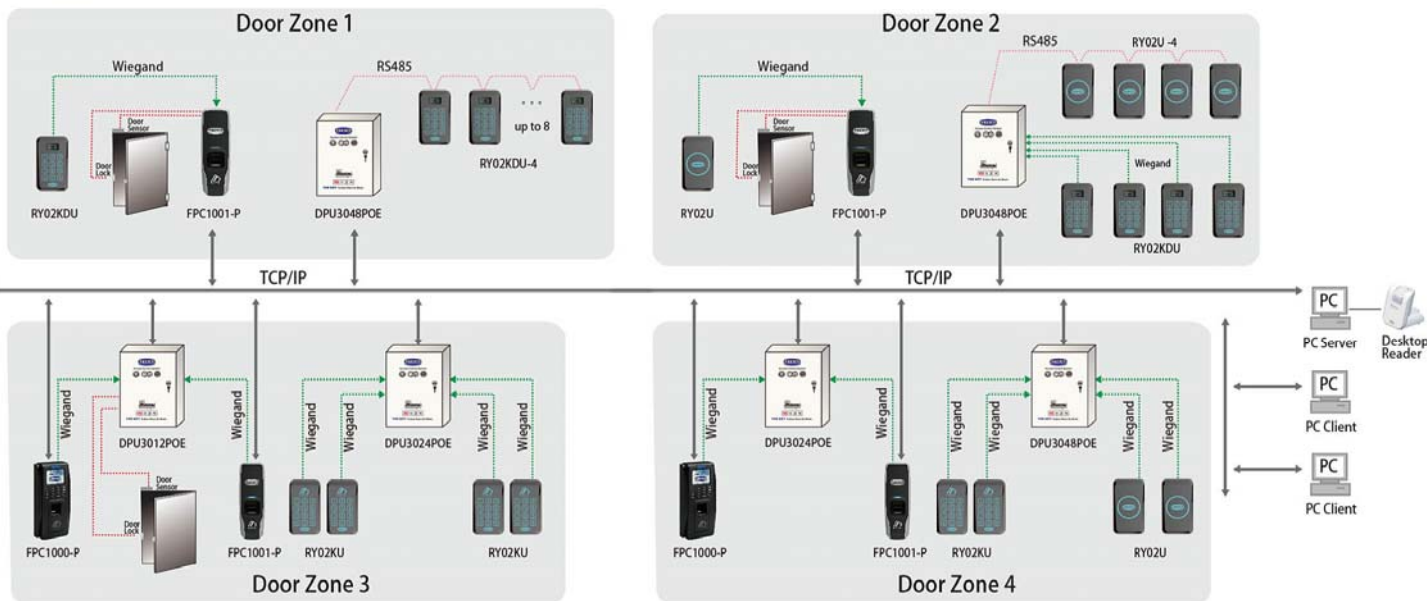

Head Quarters (Keyking Hongkong)

Add: 3F, HongKong Trade CTR, 161-167 DES Voeux RD Central, HongKong

E-mail: info@keyking.net

http://www.keyking.net

Tel: +852-5569 0622

©2017 Keyking Group. Keyking and identifying product names and numbers herein are registered trade marks of Keyking. All non-Keyking brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.

